

# Assembly & Installation Instructions

For Current Pendant 13-7650

**A256**

Page 1 of 3

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.**


This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## **To Install to Ceiling** (Figures 1 thru 5)


### Component Part

A Ceiling Bracket	G Supply wire
B Cable Gripper (2)	H Strain Relief
C Gripper Nut (2)	I Washer
D Canopy	J Cupped Washer
E Support Cable (2)	K Hex Nut
F Fixture	

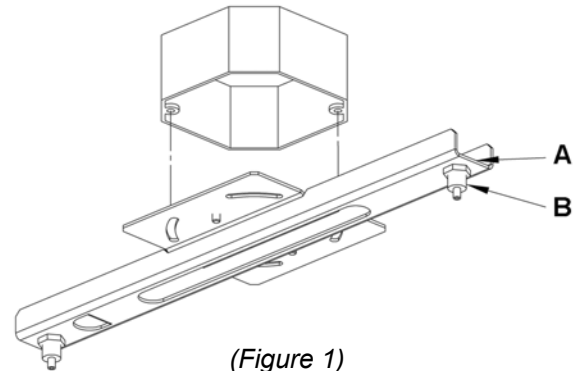

**Caution: Be sure power is off at the main breaker box prior to installation.**

1. Carefully unpack the fixture from the carton.
2. Using two machine screws (not provided), fasten the ceiling bracket (A) to the electric box.  
*Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.*
3. Slip gripper nuts (C) onto the support cables (E) and allow to rest on top of fixture (F).
4. Pull support cables (E) and supply wire (G) through canopy (D) allowing canopy to rest on top of fixture (F).
5. Raise fixture and push support cables (E) through cable grippers (B) until desired fixture height is accomplished and level.
6. Slip supply wire (G) through strain relief (H) and push supply wire (G) through slot on the bottom of ceiling bracket (A) followed by washer (I). Adjust location of strain relief (H) on supply wire (G) until it will snap into location provided on ceiling bracket (A).
7. Snap strain relief (H) onto supply wire (G) and push into tab on ceiling bracket (Figure 3).
8. Once support cables are at the correct height, excess cable can be cut off. To keep the strands of cable together a small piece of electrical tape can be applied to the cut end.
9. Cut excess supply wire (G) allowing enough left (approx. 6") to make connections in the electrical box. Strip outside jacket being careful not to cut through shielding of the two inner conductors.

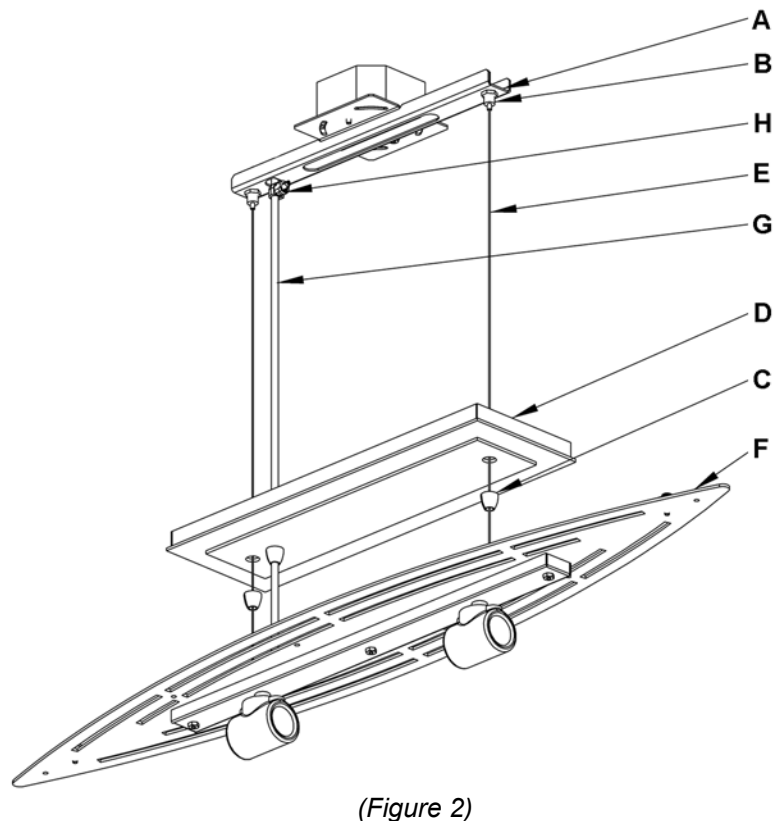

(continued)


# Assembly & Installation Instructions

For Current Pendant 13-7650


**A256**

Page 2 of 3


10. Run a pigtail lead from the ceiling bracket (A) using cupped washer (J) and hex nut (K) to the junction box. Using suitable wire connectors (not provided) connect unshielded wire from supply wire (I) to all ground wires (bare copper or green shielded) (Figure 4).
11. Using suitable wire connectors (not provided) connect fixture wires to supply (wire with white tracer to white and wire with no tracer to black). **Caution:** Make sure wire connectors are twisted on securely, and no bare wire is exposed.
12. Raise canopy (D) and push firmly to ceiling making sure that no wires are pinched between fixture canopy and ceiling. Fasten to ceiling by threading gripper nuts (C) onto grippers (B) (Figure 5).

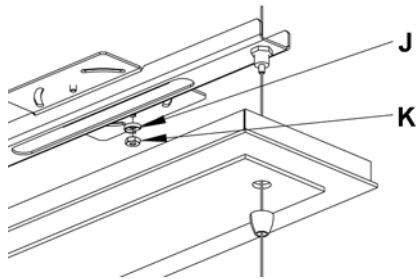

(Figure 4)

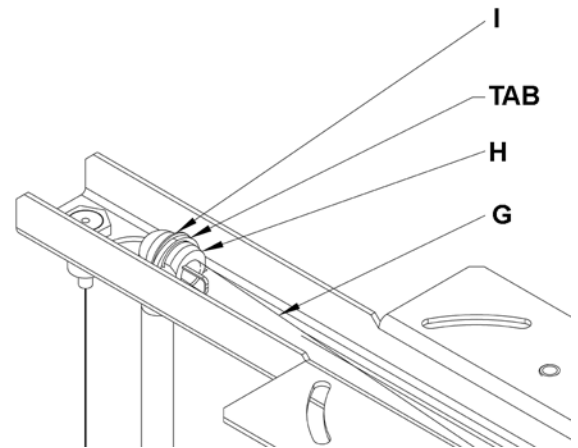

(Figure 3)

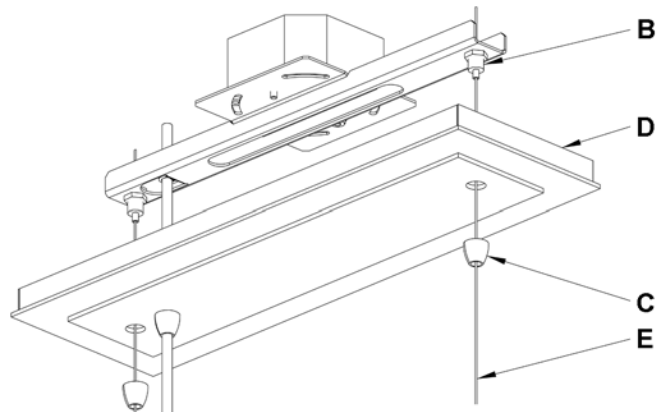


(Figure 5)

## Fixture Assembly (Figures 6 thru 9)

### Component Parts

- F Fixture
  - L Center Plate Assembly
  - M 8-32 Screws (6)
  - N Outside Plate Assembly (2)
  - O Diffuser
  - P Shade
  - Q Thumb Screw with Washer and Hex Nut (2)
1. Install two 8-32 screws (M) through the top of fixture (F) and thread into center plate assembly (L) until snug (Figure 6).
  2. Install two 8-32 screws (M) through the top of fixture (F) and thread into the first outside plate assembly (N) until snug (Figure 7).

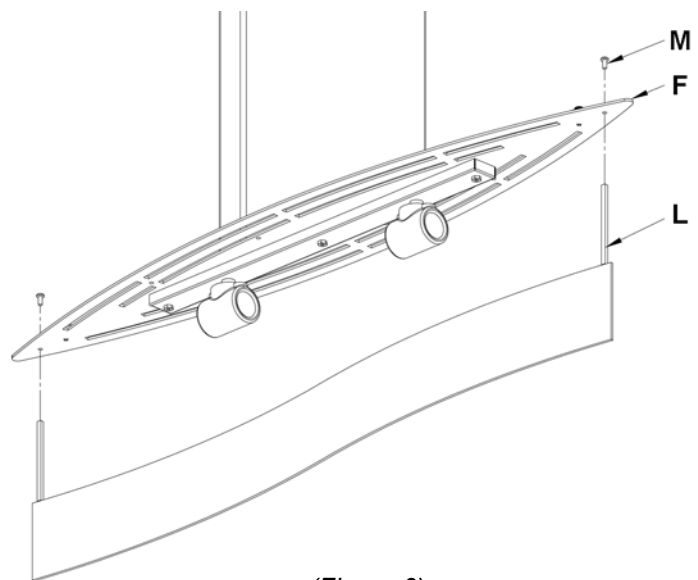

(Figure 6)

(continued)




# Assembly & Installation Instructions

For Current Pendant 13-7650

**A256**

Page 3 of 3

3. Install diffuser (O) so it rests on top of center plate assembly (L) and the notch is against the previously installed outside plate assembly (N) (Figure 8).
4. Install two 8-32 screws (M) through the top of fixture (F) and thread into the second outside plate assembly (N) until snug (Figure 8).
5. Install Bulbs (not included).
6. Install shade (P) from the bottom and tilt so it will pass fixture (F). Lower the shade so it rests on top of the fixture.
7. Secure the shade (P) with the thumb screw, washer and hex nut.
8. Restore electricity at the main breaker.

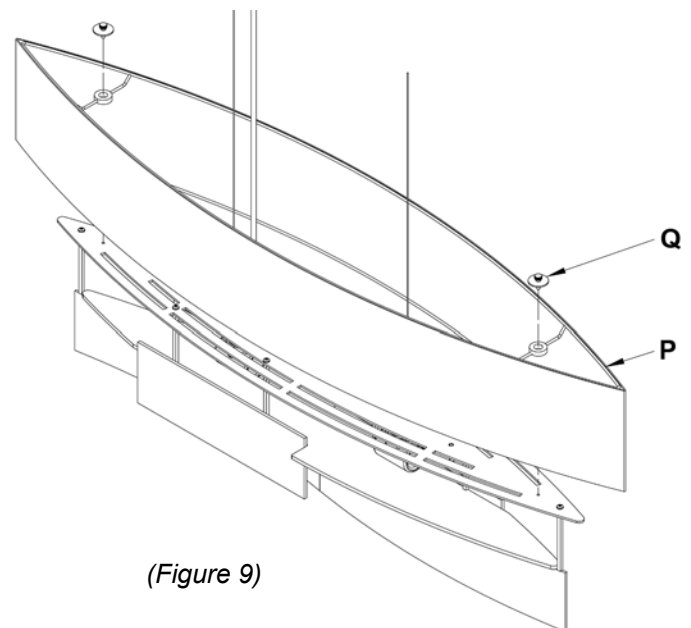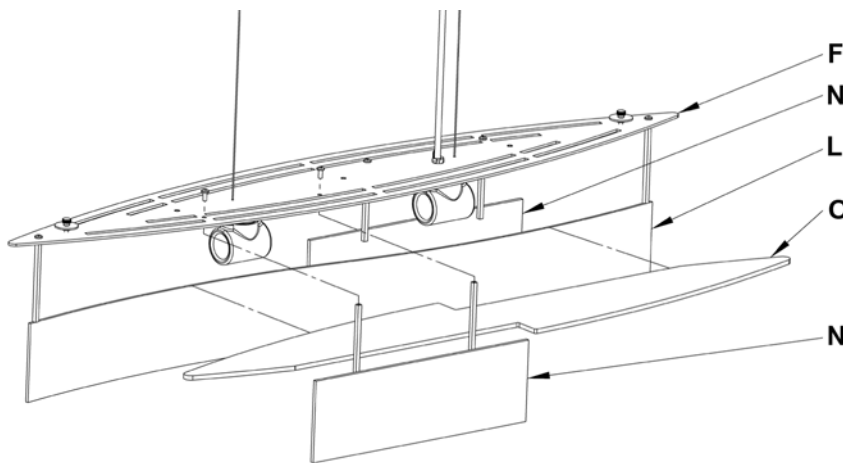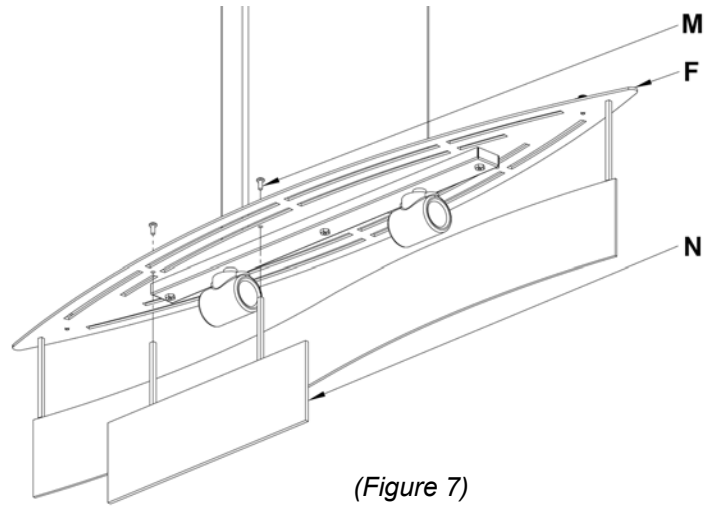

*If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!*

\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.