

A451




## Assembly & Installation Instructions

# Assembly & Installation Instructions

Monarch Multi-light Pendant 136533

A451

## Contents

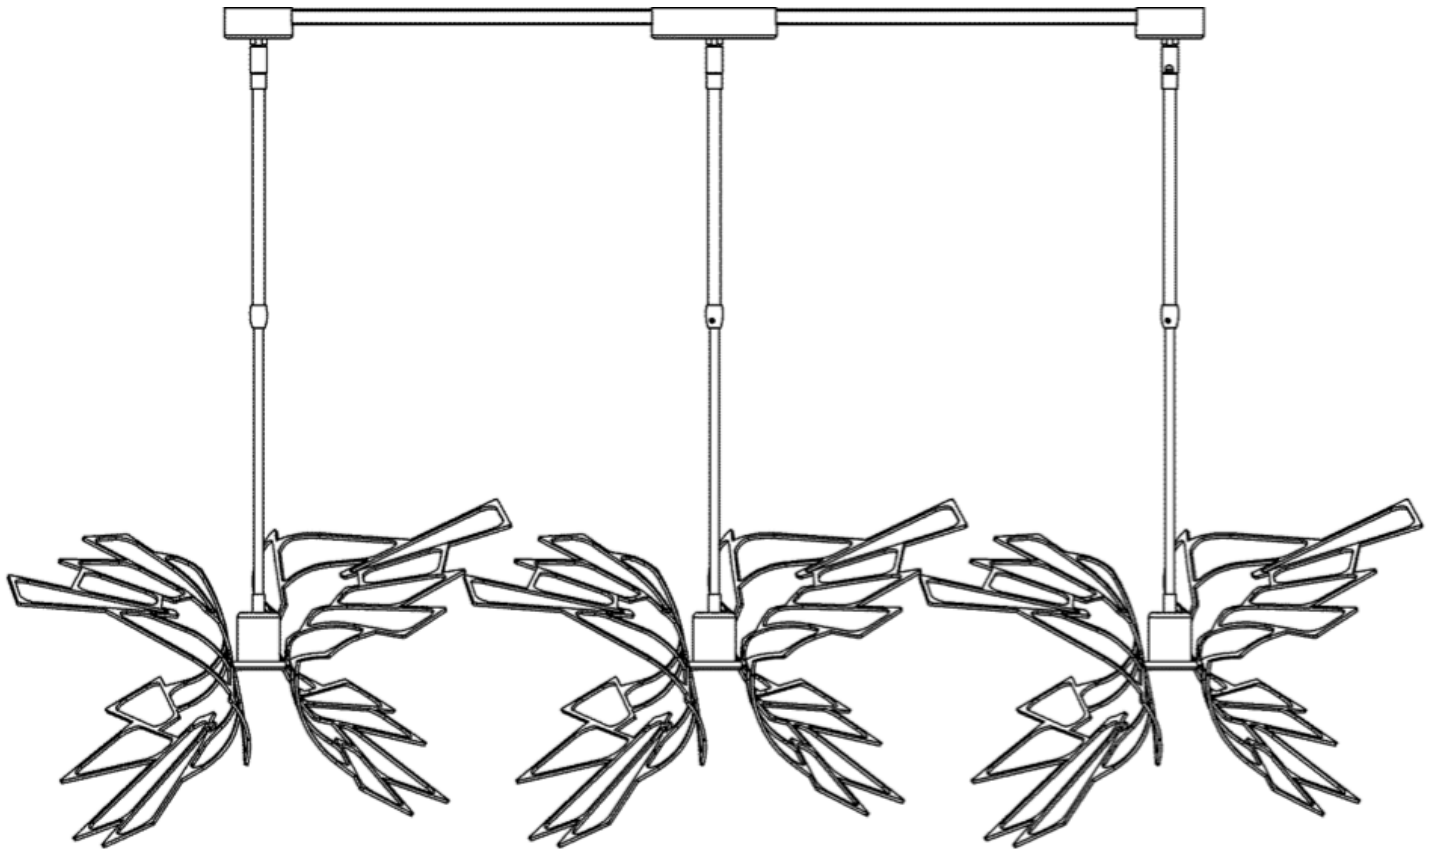

Monarch Multi-light Pendant 136533

### Component Parts

<b>A</b>	<b>Accent (3)</b>
<b>B</b>	<b>Fixture Pipe (3)</b>
<b>C</b>	<b>Coupling (3)</b>
<b>D</b>	<b>Cup (3)</b>
<b>E</b>	<b>Canopy Pipe (3)</b>
<b>F</b>	<b>Middle Canopy Can</b>
<b>G</b>	<b>Side Canopy Can (2)</b>
<b>H</b>	<b>Clutch (3)</b>
<b>I</b>	<b>Plastic Sleeve (3)</b>
<b>J</b>	<b>Set Screw (3)</b>
<b>K</b>	<b>Long Threaded Studs with Barrel Knobs (2)</b>
<b>L</b>	<b>Middle Crossbar</b>
<b>M</b>	<b>Safety Cable</b>
<b>N</b>	<b>Short Threaded Studs with Barrel Knobs (4)</b>
<b>O</b>	<b>Ground Screw</b>
<b>P</b>	<b>Cupped Washer</b>
<b>Q</b>	<b>Outside Mounting Plate</b>
<b>R</b>	<b>Provided Screws</b>
<b>S</b>	<b>#8 Screw</b>



# Assembly & Installation Instructions

## Monarch Multi-light Pendant 136533

A451

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

### Stem Assembly (Figure 1 & 2)


1. Carefully unpack the fixture from the carton.
2. Slip fixture pipe (B) over wires, making sure the end with unpainted threads goes on first.
3. Apply a drop of the supplied thread locking compound to the threads of fixture pipe (B) and screw into coupling (C), being careful not to twist or pinch the wires.

**Note:** Be careful not to scratch the fixture pipe (A) while raising the decorative element (B).

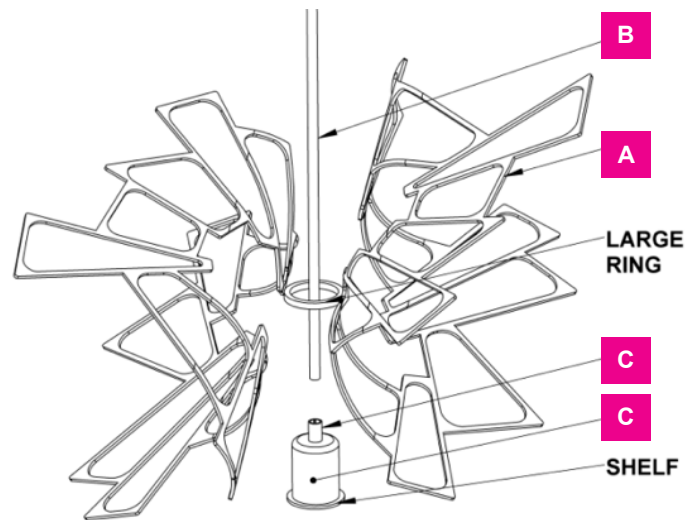

(Figure 1)

4. Run the wires and fixture pipe (B) up through the large ring of the accent (A). Make sure the accent (A) is oriented with the welds on the large ring facing the ceiling. Rest the accent (A) on the shelf of cup (D). (Figure 1)
5. Repeat this for the remaining two accents (A), fixture pipes (B), and couplings (C).
6. Run one set of wires through the canopy pipe (E).
7. Unscrew the clutch (H) from the canopy pipe (E); slide it across the wires and onto the fixture pipe (B). Follow this with the plastic sleeve (I), oriented so the tapered end nests in the clutch (H). (Figure 2)
8. Slide the canopy pipe (E) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surfaces and to pull excess wire up through the canopy pipe (E). There must be a minimum 1-1/2" of inner pipe inside the outer pipe. Screw clutch (H) onto canopy pipe (E). Tighten the set screw (J) firmly with hex wrench provided. Important: To ensure full connection strength, be sure the tapered end of the plastic clutch sleeve is oriented toward the clutch when assembled and securely tighten set screw (Figure 2).

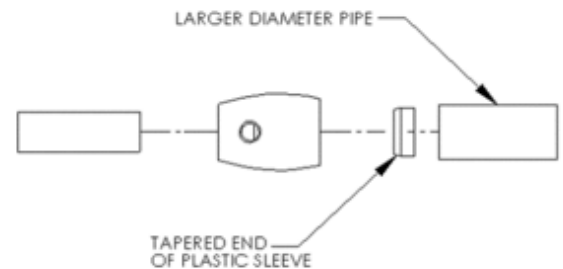

(Figure 2)

9. Repeat this for the other two fixture pipes (B).



If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture. Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Castleton, Vermont USA | VERMONTMODERN.COM

36124 Rev A

# Assembly & Installation Instructions

## Monarch Multi-light Pendant 136533

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


### Complete Assembly and Install Fixture (Figures 3 & 4)

**CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.**

- Using two machine screws (not provided), attach the middle crossbar (L) to the electric box.

*Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.*

- Making sure to keep the canopy in the orientation desired and using the provided screws (R) attach the two outside mounting plates (Q) to the ceiling.
- Before hanging each pipe/canopy assembly make sure that the notches in the swivels are all facing the same direction. (Figure 3)
- Raise a side canopy can (G) to one of the outside mounting plates (Q) and run the black, white, and green ground wires through the square tube toward the middle crossbar (L).
- Using short threaded studs with barrel knobs (N) secure the side canopy can (G) to the outside mounting plate (Q).
- Repeat this for the second side canopy can (G) on the opposite mounting plate making sure to keep the notches in the swivel facing the same direction as the other swivel.
- Raise the middle canopy can (F) to the ceiling and using one of the #8 screw (S) found in the kit bag attach the safety cable (M) to the middle crossbar (L) and suspend the middle canopy can (F).
- Using suitable wire connectors (not provided), connect the fixture wires from all three cans to supply wires (white to white supply, black to black supply). Connect a pigtail lead to the crossbar ground screw (O) and cupped washer (P). Connect all ground wires (bare copper or green to bare copper or green). Push wires back into outlet box.

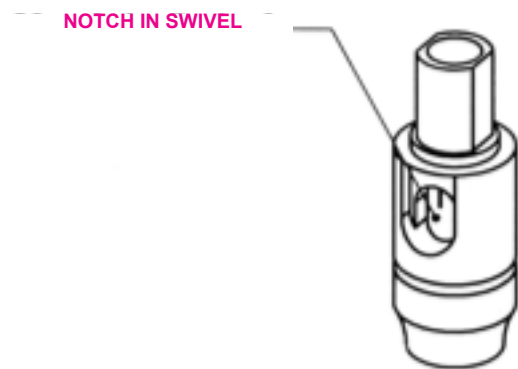

(Figure 3)

# Assembly & Installation Instructions

## Monarch Multi-light Pendant 136533


**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

### Complete Assembly and Install Fixture (Figures 3 & 4)

**CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.**

9. Slide middle canopy can (F) against ceiling and use the long threaded studs with barrel knobs (K) to secure to the middle crossbar (L)
10. Install a bulb in each socket, not included.
11. Restore electricity at main breaker.

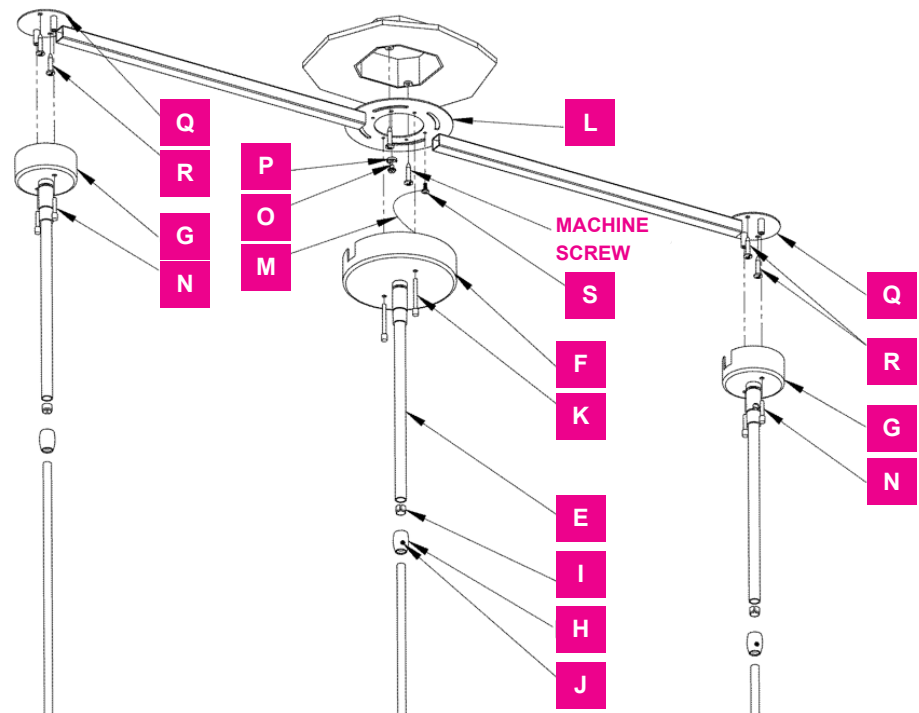

(Figure 4)



If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture. Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.