

Assembly & Installation Instructions

Monarch Semi-Flush 129022

A463


Page 1 of 3

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware is possible due to our kits being used on multiple products and options.

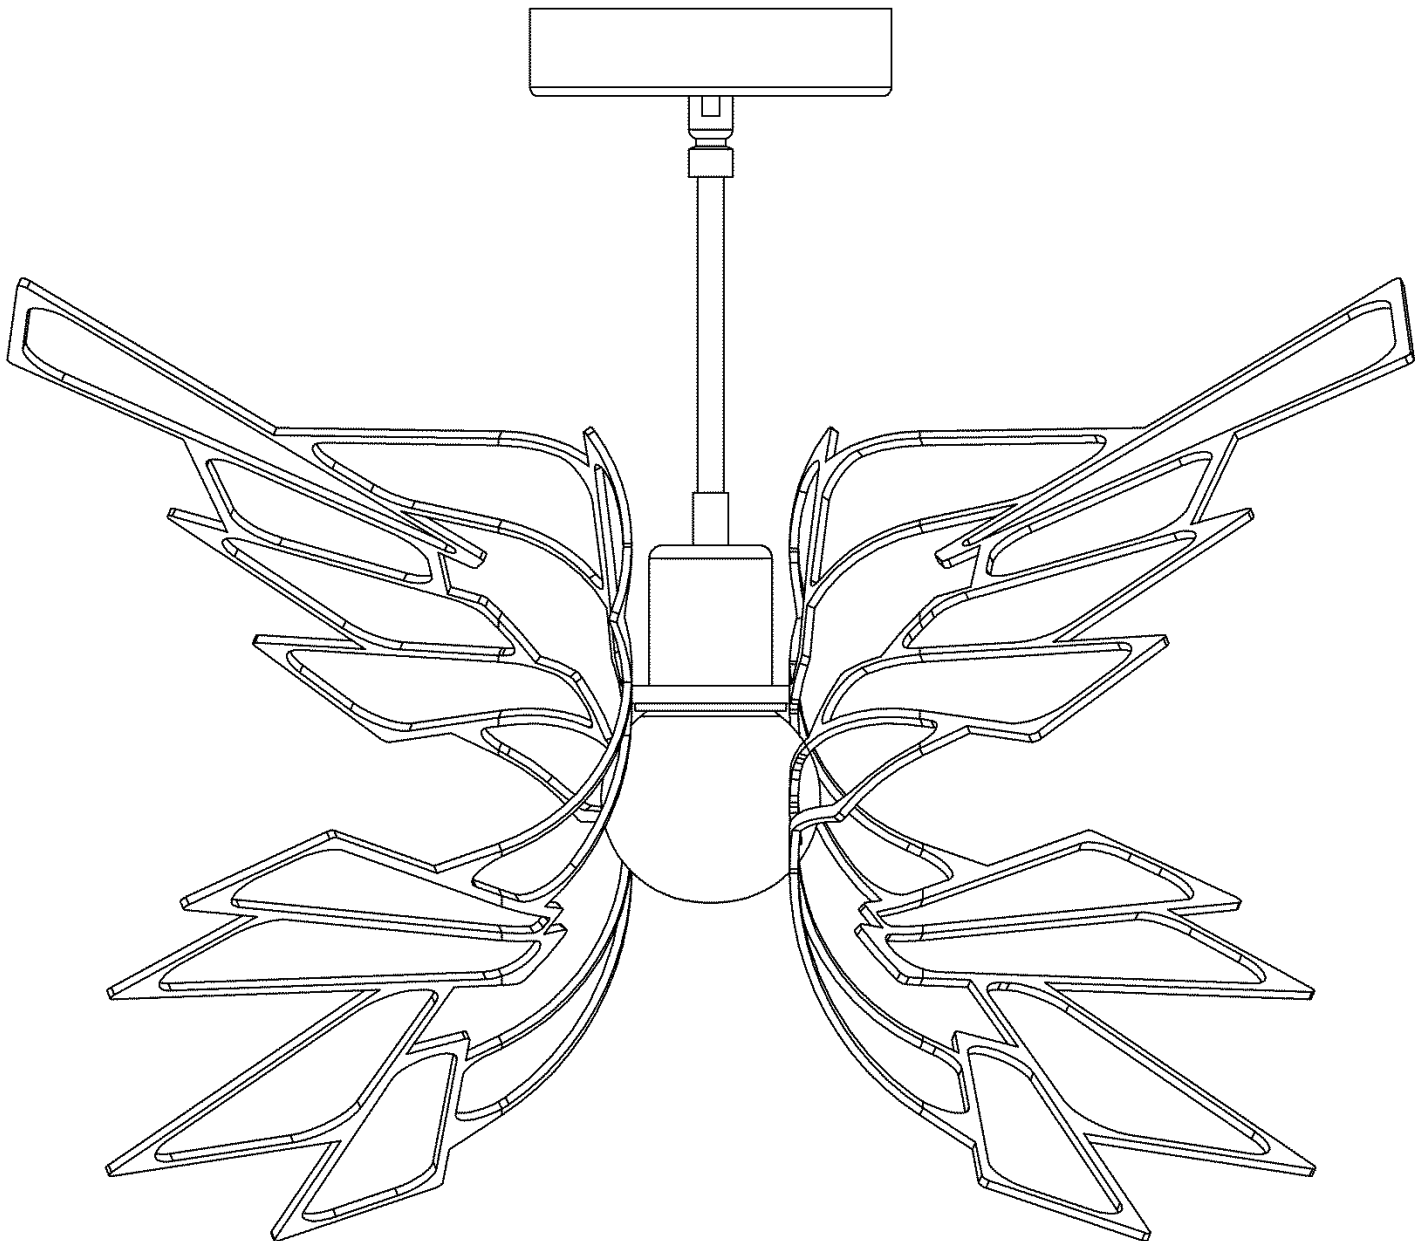

Component Parts

A	Accent
B	Fixture Pipe
C	Coupling
D	Cup
E	Threaded Studs (2)
F	Crossbar
G	Canopy
H	Ground Screw
I	Cupped Washer
J	Barrel Knobs (2)

Assembly & Installation Instructions

Monarch Semi-Flush 129022

A463

Page 3 of 3


Complete Assembly and Install Fixture (Figures 1 & 2)

Component Parts

A	Accent	E	Threaded Studs (2)	I	Cupped Washer
B	Fixture Pipe	F	Crossbar	J	Barrel Knob (2)
C	Coupling	G	Canopy		
D	Cup	H	Ground Screw		

Caution: Be sure power is off at the main breaker box prior to installation.

1. Carefully unpack the fixture from the carton.
2. Insert threaded studs (E) into the crossbar (F) making sure that the threaded studs (E) line up with the holes in the canopy (G)
3. Using two machine screws (not provided), attach the crossbar (F) to the electric box with the threaded studs (E) sticking downward. **Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.**
4. Run the wires from the coupling (C) up through the large ring, making sure the accent (A) is oriented so that the bottom of the large ring is flush with the accent (A). (Figure 1)
- 5.
6. Slide the accent (A) over the cup (D) and rest it on the shelf located on the bottom of the cup (D).
7. Run the wires through the fixture pipe (B) and up through the canopy (G)
8. Apply a drop of the supplied thread locking compound to the threads of fixture pipe (B) and screw into coupling (C), being careful not to twist or pinch the wires.

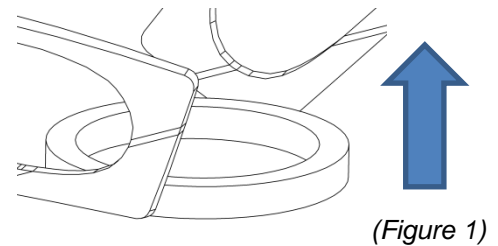


(Figure 1)

Note: Application of the thread locking compound is necessary to prevent the pipe from loosening during regular maintenance and cleaning of the fixture. Be certain to apply the compound.

9. Install the ground screw (H) and the cupped washer (I) into the crossbar (F). Attach a pigtail ground wire to the ground screw.
10. Raise the fixture to the ceiling and using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white supply, black to black supply). Connect all ground wires (bare copper or green to bare copper or green). Push wires back into outlet box. **Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.**
11. Line up holes in the canopy (G) with the threaded studs (E). Push the canopy (G) to the ceiling making sure no wires are pinched. Secure the canopy can (G) with the two barrel knobs (M).

Note: Be sure the threaded studs (E) are fully seated in the barrel knobs (M)

12. Install bulb, not included.
13. Restore electricity at main breaker.

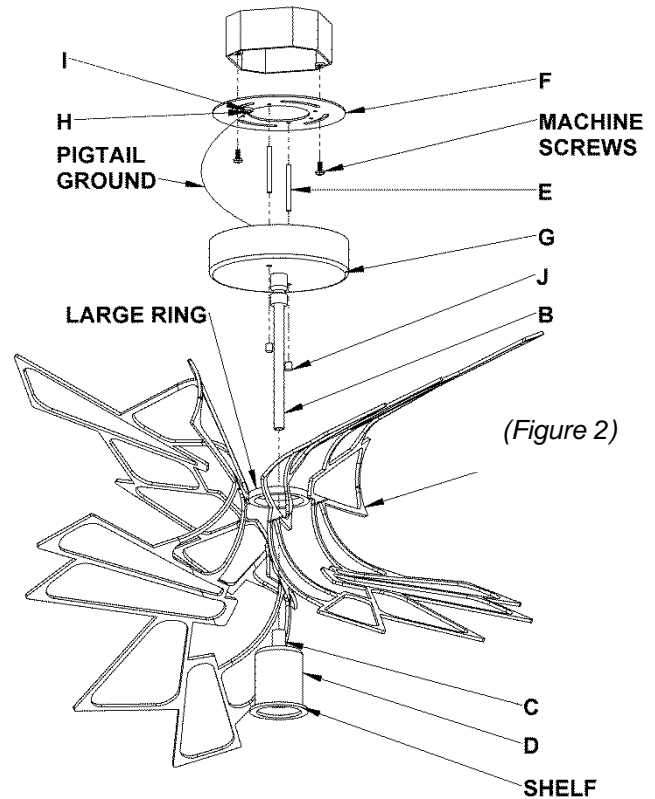

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture

Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.