

A471




## Assembly & Installation Instructions

# Assembly & Installation Instructions

Filament Semi-Flush 129018

A471

## Contents

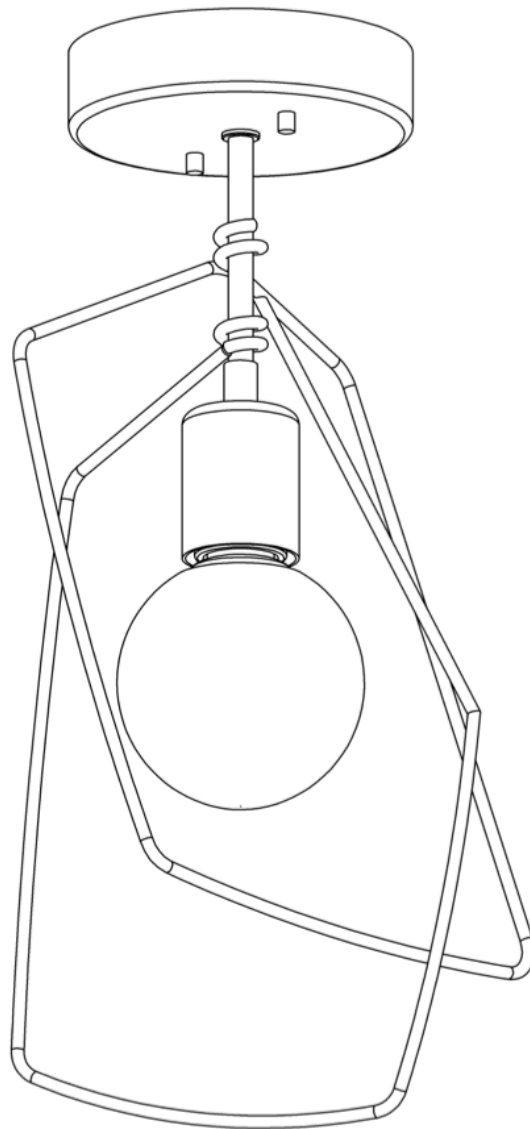

Filament Semi-Flush 129018

# Assembly & Installation Instructions

Filament Semi-Flush 129018

---

A471

## Component Parts

- A**      **Crossbar**
- B**      **Ground screw**
- C**      **Studs (2)**
- D**      **Canopy**
- E**      **Coupling**
- F**      **Barrel Nuts**
- G**      **Decorative Element**
- H**      **Pipe**
- I**      **Socket Cup**
- J**      **Bulb (not included)**



vermont  
**modern**  
BY HUBBARDTON FORGE

Castleton, Vermont USA | VERMONTMODERN.COM

37263

# Assembly & Installation Instructions

## Filament Semi-Flush 129018

A471

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

**Please Note:** After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

### To Install Fixture (Figure 1)

**CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.**

1. Carefully unpack the fixture from the carton.
2. Thread studs (C) through appropriate holes in crossbar (A) to match holes in canopy (D).
3. Using two machine screws (not provided), fasten the crossbar (A) to the electric box with threaded studs (C) pointing downward.


**Note:** A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

4. Run the wires from the coupling (E) through the decorative element (G), pipe (H) and canopy (D).
5. Apply a drop of the supplied thread locking compound to the internal threads of the coupling (E) and thread coupling (E) onto pipe (H), being careful not to twist the wires. Allow decorative element to slide down and rest on the socket cup (I). Be careful to not scratch fixture pipe.

**Note:** Application of the thread locking compound is necessary to prevent the stem from loosening during regular maintenance and cleaning of the fixture. Be certain to apply the compound.

6. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Attach a pigtail lead to the crossbar ground screw (B). Connect all ground wires (bare copper or green to bare copper or green).

**CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.**

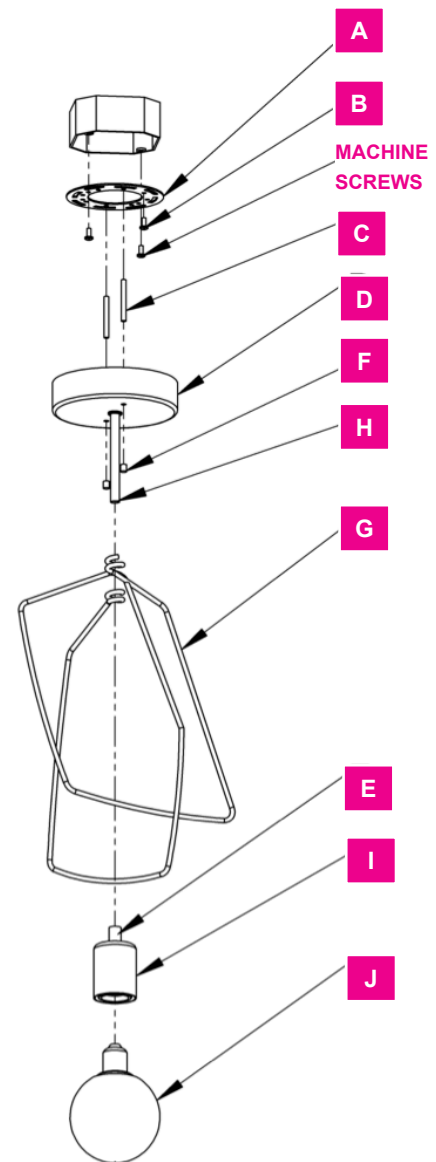

(Figure 1)

# Assembly & Installation Instructions

A471

## Filament Semi-Flush 129018

**CAUTION:** FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

**Please Note:** After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

### To Install Fixture (Figure 1 ) *continued*

7. Slide canopy (D) over threaded studs (C) and push firmly to ceiling, making sure that no wires are pinched between fixture canopy (D) and ceiling. Fasten with barrel nuts (F). Be sure studs (C) are fully seated in the barrel nuts (F).
8. Install bulb (J) (not provided).
9. Restore electricity at main breaker.



vermont  
modern  
BY HUBBARDTON FORGE

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture. Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Castleton, Vermont USA | VERMONTMODERN.COM

37263